

13.3" Industrial Touch Monitor with Capacitive Touch Screen

Overview

This is a 13.3-inch 16:9 industrial monitor designed specifically for industrial applications. Equipped with a projected capacitive multi-touch screen, the device features a highly durable metal enclosure. Its front panel boasts an IP65 protection rating to resist ingress of water and dust. It supports three signal interfaces: VGA, HDMI and DVI. In addition, it adopts an ultra-slim design and supports mounting with VESA 100 and 75 standard brackets as well as panel flush mounting, which simplifies installation procedures for various usage scenarios.

Features

- 13.3" LED-backlit LCD with capacitive touch screen
- 1x VGA, 1x DVI, 1x HDMI, 1x USB2.0
- DC-IN 12 to 24V
- Supports VESA 100, 75 mount and panel mount
- IP65 compliant front panel



Operating Temp.




IP65



Touch Display



I/O Interfaces

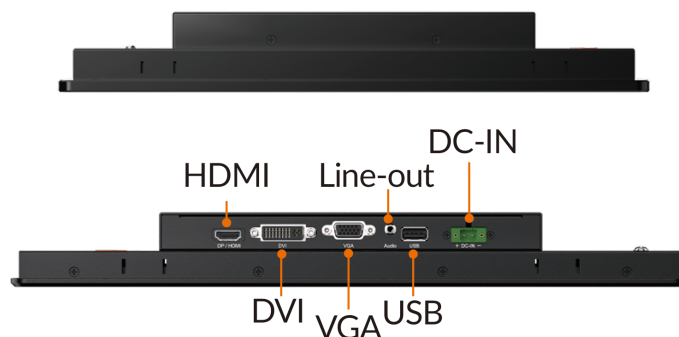

Specifications

Display	
Size	13.3 inch
Touch Type	Projected capacitive multi touch
Transmittance	87% (capacitive)
Control Interface	USB
Surface Hardness	≥7H Anti-glare coating
Resolution	1920 x 1080
Luminance	350 nits
Contrast Ratio	1000: 1
View Angles	85 (left), 85 (right), 85 (up), 85 (down)
LED Lifetime	30,000 hrs
Color	16.7M
I/O Ports	
USB	1x USB 2.0
Display	1x HDMI(lockable), 1x VGA, 1x DVI
Power	
Button	Yes
DC Input	12 to 24VDC
Power Connector	Phoenix Connector
Power Consumption	10W
Power Adaptor	N/A
Mechanical	
Dimensions (W x D x H)	324.5x 202.5 x 44.8 mm
Weight (N.W.)	1.8 kg
Mounting	Panel mount, wall mount bracket VESA 100,75
Material	Aluminum alloy panel, all-metal chassis
Environment	
Operating Temperature	-10 to 50°C (14 to 122°F)
Storage Temperature	-20 to 60°C (-4 to 140°F)
Relative Humidity	10% to 95% @ 40°C (104°F), non-condensing
Vibration	5 to 500Hz, 0.026 G ² /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis
IP Rating	IP65 compliant (for front panel)
Certification	
EMC	CE FCC UKCA
Packing List	
Packing List	1x Monitor 8x panel mounting buckles 1x warranty card

Dimensions

